

Medallion Series



Quality Commercial Cooking Equipment

HD11-2-0, HD11-2-M

11" WIDE OPEN BURNER RANGE attachment with storage base, or as modular top

Standard Features

- Stainless steel front and sides STANDARD
- 6" (152mm) chrome steel adjustable legs
- Adjustable stainless steel front rail 6-1/16" (154mm) to 7-5/8" (194mm)
- (2), 30,000 BTU (8.8 kW), "Lift-Off" burners
- Removable cast-iron grates over each burner
- One-piece aluminized steel drip tray
- 1-1/4" NPT front manifold.
- Storage base interior is aluminized steel
- One year limited parts & labor warranty, (USA and Canada only)

Optional Features


- Stainless steel back rear panel
- Stainless steel common front rail up to 68" (1728mm) wide, (No additional charge)
- Rear gas connection on select models, 3/4" or 1" NPT
- End caps and cover (no charge)- Must specify
- Polyurethane non-marking swivel casters (2) w/front brakes.
- Storage base shelf-aluminized or stainless steel
- Single deck stainless steel high shelf
- 10" (254 mm), 17" (432mm) 22.375" (568mm) 34.375" (873mm) high stainless steel backguard



Short Form Specifications:

Heavy-Duty "Medallion Series" gas 11" two burner attachment with storage base, Model : HD11-2-0 manufactured by American Range. Storage base to include removable hinged door. To have stainless steel front and sides with 6"chrome legs (unless otherwise specified). Two (2) 30,000 Btu/hr each Lift-Off cast iron burners. Heavy duty cast iron grate per burner section. Unit to be 11-3/8" (288mm) wide and 38" (965mm) deep with front rail fully extended. Adjustable front rail maximum of 7-5/8" (194mm). Specify Natural gas (NG) or Liquid Propane gas (LP). UL, CUL, NSF, MEA listed. (also available as a Modular Top-Model : HD11-2-M).

11" WIDE OPEN BURNER RANGE attachment with storage base, or as modular top

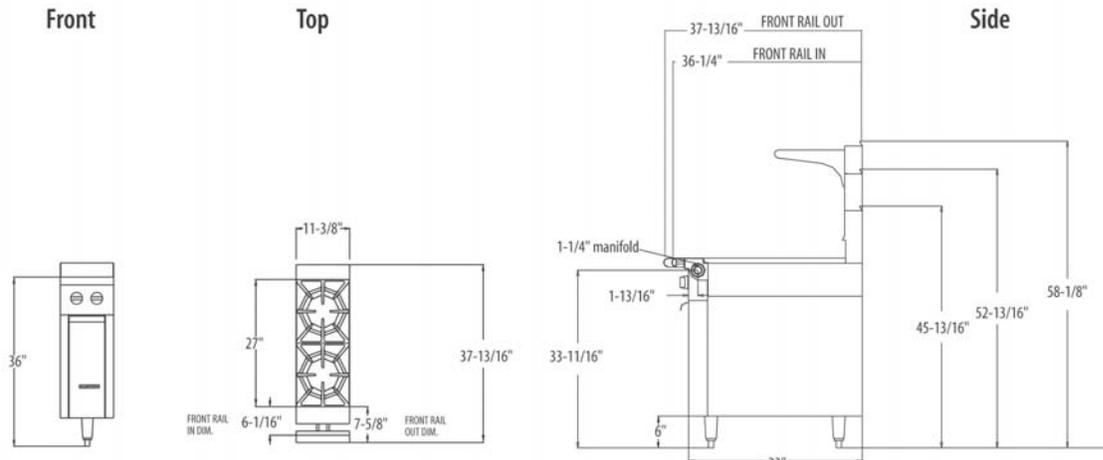

Exterior Dimensions

| | | |
|-----------------------------|--------------------------|-----------------------|
| Model # | HD11-2-0 | HD11-2-M |
| Width | 11-1/4"/285mm | 11-1/4"/285mm |
| Depth | 38"/965mm (Rail out Dim) | 38"/965mm |
| Height w/NSF legs | 36"/914mm | 36"/914mm(w/stand) |
| Height Less NSF Legs | 30"/762mm | 8"/203mm (less stand) |

Storage Base Interior

| | | |
|----------------------------|--------------|-------|
| Width | 6-3/4"/171mm | N/A |
| Depth | 30"/762mm | N/A |
| Height | 20"/508mm | N/A |
| Unit Weight (LB/KG) | 130/59 | 55/25 |

| INPUT-Btu/hr (N-Gas) | HD11-2-0 | KW Eq | HD11-2-M | kW Equivalent |
|-----------------------------|-----------------|--------------|-----------------|----------------------|
| O/T Burner (30,000BTUea) | 60,000 | 17.58 | 60,000 | 17.58 |
| TOTAL | 60,000 | 17.58 | 60,000 | 17.58 |

0= Storage Base M= Modular Top

Installation Notes:

Combustible Wall Clearances

Sides: 6" (152mm)

Back: 6" (152mm)

For reduced clearances, refer to ANSI Z223.1/NFPA #54 and CAN/CGA B149.

Entry Clearance:

Crated: 16-1/4" (413mm)

Uncrated: 11-7/8" (302mm)

Manifold Pressure:

Natural 6 W.C. (15 mbar)

Propane 10 W.C. (25 mbar)

NOTE: Data applies only to North America.

Gas Input Ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Gas Input Ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

Please specify gas type when ordering.



Because of continuing product improvement these specifications are subject to change without notice.